

Downlight

Remote Driver

Recessed mount



Features

- Aluminium housing
- Polycarbonate diffuser
- Slide switch function for colour temperature change
- High efficiency SMD chips
- Constant current driver
- IC-4 (TSDL10WRTRI only)
- Large terminals for easy installation
- Operating temp: -20°C to 45°C
- IP54 rated


Dimming Options

- Trailing and leading edge
- Universal

Includes

- Fixed head LED downlight
- Remote dimmable LED driver
- 0.6m flex and plug 2-pin

CERTIFICATION	IP RATING	DIMMABLE
		
IC-4	COLOUR CHANGE	BOX CTN QTY
 TSDL10WRTRI only		1 36 1 30 1 20 1 10

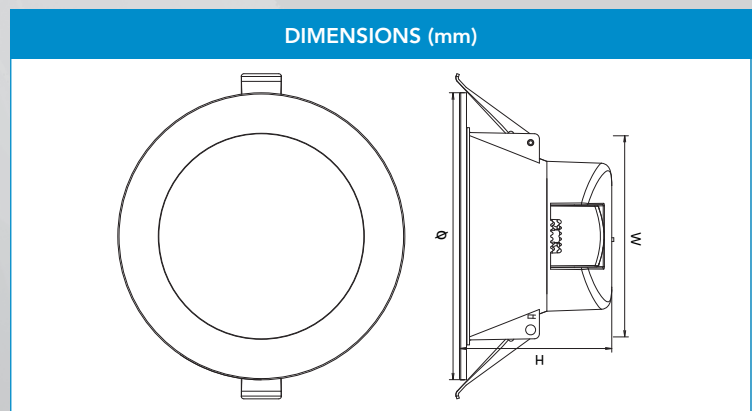

Part No.	Voltage	Watt	PF	CCT	Ra	Lumens	Beam Angle	Lifetime hrs	Fitting Colour	Dimensions (W x H x D)mm	Cutout Ømm
TSDL10WRTRI	200-240V	10W	0.9	3000K, 4000K, 5700K	80	800-950-850	90°	50,000	White	88 x 38 x 110	90-95
TSDL15WRTRI	200-240V	15W	0.9	3000K, 4000K, 5700K	80	1200-1430-1280	90°	50,000	White	118 x 45 x 145	120-130
TSDL18WRTRI	200-240V	18W	0.9	3000K, 4000K, 5700K	80	1410-1800-1710	90°	50,000	White	155 x 45 x 190	160-170
TSDL25WRTRI	200-240V	25W	0.9	3000K, 4000K, 5700K	80	2150-2650-2430	90°	50,000	White	198 x 45 x 228	200-210

Part No.	Model No.	VEET Status	IPART Status
TSDL10WRTRI	UP-DL97-3-10W-P3	Pending	Pending
TSDL15WRTRI	UP-DL97-3-15W-P3	Pending	Pending
TSDL18WRTRI	UP-DL97-3-18W-P3	Pending	Pending
TSDL25WRTRI	UP-DL97-3-25W-P3	Pending	Pending